




Features:

- 2640Lumen for T8 tube, 4 times brighter than traditional tube
- Over 50,000hours lifespan
- Free of Toxic Mercury and Lead
- Energy saving for less electricity bill
- Special circuit design to ensuring each LED to work independently, if one broken doesn't influence on others
- Rapid start, steady work, no noise, easy to Installation
- Made with SUNTECH (brand name) LED to ensure stable quality
- For factories, workshops, warehouses, Supermarkets, exhibition halls and similar applications.

Dimension Specifications:

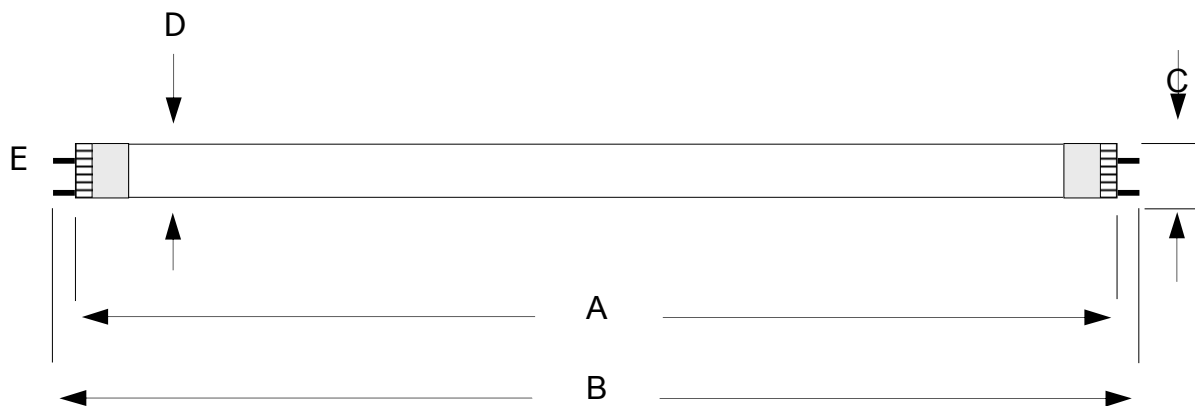

	A	B	C	D	E
4 feet	1198 mm	1212mm	30 mm	26 mm	G13

※ : Tolerance is according to mechanical drawing unless otherwise noted

Electrical Specification:

Item	Suntech-T8-AC-65K
Input Voltage (V)	AC85-265
Color Temperature(CCT)	6500K
Body Material	PC cover+ aluminum alloy
Light source	SANAN2835 SMD LED
lamp holder	G13
Dimensions	L1212mm xDØ26mm
Weight	0.42lb(191G)
Ambient Humidity	≤95%
Ambient Temperature	~-22°F to ~+122°F ~-30°C to ~+50°C
Color rendering index (CRI)	>80
Power	22W
Lumens	2640lm
Efficiency lm/w	120
Power factor	0.97
Working lifetime	50000hours
Warranty(years)	3

Application

- Office Lighting
- Corridor and Hall Lighting
- Interior Design Uses
- Retail Store Displays
- Retail Coolers and Freezers
- General Outdoor Signage Backlighting
- Task Lighting, Under Cabinets, and above Counters
- Manufacturing Assembly Work Stations

